

OPNsense® Desktop Security Appliance DEC600 Series NEW DESIGN! SMALLER, COOLER, UPDATED MAINBOARD




specifications of DEC695


3.3 Gbps
FIREWALL


600 Mbps
IPsec VPN


256 GB
Storage


8 GB
DDR3 RAM


0 dB(A)
Fan less

CONSUMES
50%
LESS*

* Compared to previous models [DEC670 / DEC690]

Gigabit Performance.

This embedded appliance delivers gigabit performance yet doesn't make a sound. The specially designed cooling profile allows for cool operation even when stressed to the max.



3.300Mbps Throughput
275.000 Packets per Second



327Mbps Inline High Speed
Intrusion Prevention &
SSL Finger Printing



Fast Filtering
35.000 connections P/S
Low Latency ~1.6mS (with
CoDel & Traffic Shaper)



Hardware Assisted Encryption
600Mbps IPsec (AES256GCM16)



Guard Web Access
Filtering (SSL) Proxy
Captive Portal with Voucher
support



Up to 256Gb NVMe
Offering Sufficient Space for
Logging & Reporting



System wide two-factor
authentication.
Compatible with Google
Authenticator.

Securing Networks™

NEW DEC600 SERIES




* Compared to previous models [DEC670 / DEC690]

Bundled with a free year OPNsense[®] Business Edition

- ✓ Commercial firmware repository
- ✓ Free GeolIP database
- ✓ Official OPNsense Open Virtualization Image
- ✓ Free professional plugins (OPNcentral, Proxy Access)
- ✓ Free E-Book (English & German)



Securing Networks[™]

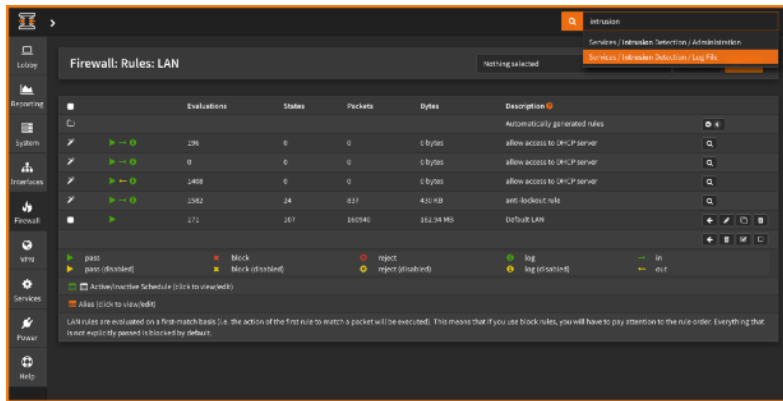

OPNsense[®] Secure Your Network With Ease[™]

OPNsense is Deciso's fast growing open source firewall and security platform released under an Open Source Initiative approved license. Its rich feature set is combined with the benefits of open and verifiable sources.

All features can be used from within the easy to use graphical interface, equipped with a build-in search feature for quick navigation. Protecting your network has never been this easy with features such as; the integrated intrusion prevention system and two-factor authentication for safely connecting mobile users.



Businesses

Protect your business network and secure your connections. From the stateful inspection firewall to the inline intrusion detection & prevention system everything is included for free. Use the traffic shaper to enhance network performance.



Schools

Limit and share available bandwidth evenly amongst students and utilize the category based web filtering to filter unwanted traffic such as adult content and malicious websites. It is easy to setup as no additional plugins nor packages are required.



Hotels

OPNsense offers a captive portal to control guest internet access for a limited duration. Vouchers can easily be created via the graphical user interface.



On the road

Even on the road OPNsense is a great asset to your business as it offers OpenVPN and IPsec VPN solution with road warrior support and two-factor authentication. The easy client exporter make configuring your OpenVPN SSL client setup a breeze.



Remote Offices / Branches & SOHO

The integrated site to site VPN (IPsec or SSL VPN) can be used to create a secure network connection to and from your remote offices. Enjoy the easy configuration and online searchable documentation with simple how-to type of articles to get you started, quickly. Pluggable support is offered for ZeroTier, Tinc as well as Wireguard.

Stateful firewall

- Filter by
 - Source
 - Destination
 - Protocol
 - Port
 - OS (OSFP)
- Limit simultaneous connections on a per rule base
- Log matching traffic on a per rule bases
- Policy Based Routing
- Packet Normalisation
- Option to disable filter for pure router mode

Policy organization

- Alias Support
 - IP addresses
 - Port ranges
 - Domain names (FQDN)
- Interface Groups
 - Create security zones with equal rules
- Rule Category
 - Easy access rule sets

Granular control state table

- Adjustable state table size
- On a per rule bases
 - Limit simultaneous client connection
 - Limit states per host
 - Limit new connections per second
 - Define state timeout
 - Define state type
- State types
 - Keep
 - Sloppy
 - Modulate
 - Synproxy
 - None

Optimisation options

- Normal
- High latency
- Aggressive
- Conservative

Authentication

- External Servers
 - LDAP
 - Radius
- Integrated Servers
 - Local User Manager
 - Vouchers / Tickets
 - FreeRadius (Plugin)

Authorization

- User Interface
 - Local User Manager

Accounting

- FreeRadius (Plugin & External)
- Vouchers / Tickets

2-Factor Authentication

- Supports TOTP
- Google Authenticator
- Supported services:
 - Captive Portal
 - Proxy
 - VPN

- GUI
- SSH / Console

Certificates

- Certificate Authority
 - Create or Import CA's
 - Create or Import Certificates
- Let's Encrypt (Plugin)
 - Automated (Trusted) CA

802.1Q VLAN support

- max 4096 VLAN's

Link Aggregation & Failover

- Failover
- Load Balance
- Round Robin
- Cisco Ether Channel (FEC)
- 802.3ad LACP

Other Interface types

- Bridged interfaces
- Generic Tunnel Interface (GIF)
- Generic Routing Encapsulation

Network Address Translation

- Port forwarding
- 1:1 of ip's & subnets
- Outbound NAT
- NAT Reflection

Traffic Shaping

- Limit bandwidth
- Share bandwidth
- Prioritize traffic
- Rule based matching
 - Protocol
 - Source
 - Destination
 - Port
 - Direction

IGMP Proxy

- For multicast routing

Universal Plug & Play

- Fully supported

Dynamic DNS

- Selectable form a list
- Custom
- RFC 2136 support

DNS Forwarder

- Host Overrides
- Domain Overrides

DNS Server

- Host Overrides
 - A records
 - MX records

- Access Lists

DNS Filter

- Supports OpenDNS

DHCP Server

- IPv4 & IPv6
- Relay Support
- BOOTP options

Multi WAN

- Load balancing
- Failover
- Aliases

Load Balancer

- Balance incoming traffic over multiple servers

Network Time Server

- Hardware devices
 - GPS
 - Pulse Per Second

Intrusion Detection & Prevention

- Inline Prevention

- Integrated rulesets
 - SSL Blacklists
 - Feodo Tracker
 - Emerging Threats ETOpen

- SSL Fingerprinting
- Auto rule update using configurable cron

Captive Portal

- Typical Applications
 - Guest Network
 - Bring Your Own Device (BYOD)
 - Hotel & Camping Wifi Access
 - Template Management
 - Multiple Zones

- Authenticators
 - All available authenticators
 - None (Splash Screen Only)

- Voucher Manager
 - Multiple Voucher Databases
 - Export vouchers to CSV

- Timeouts & Welcome Back

- Bandwidth Management
 - Use Traffic Shaper

- Portal bypass

- MAC and IP whitelisting

- Real Time Reporting
 - Live top IP bandwidth usage
 - Active Sessions
 - Time left
 - Rest API

Virtual Private Networks

- IPsec
 - Site to Site
 - Road Warrior
- WireGuard (Plugin)
 - Site to Site
 - Road Warrior
- OpenVPN
 - Site to Site
 - Road Warrior
 - Easy client configuration exporter

- Tinc (Plugin)
 - Full mesh routing

- ZeroTier (Plugin)
 - VPN, SDN & SD-WAN

High Availability

- Automatic hardware failover
- Synchronized state table
- Configuration synchronisation

Caching Proxy

- Multi interface
- Transparent Mode
- Support SSL Bump
- SSL Domain only (easy filtering)
- Access Control Lists
- Blacklists
- Category Based Web-filter
- Traffic Management
- Auto sync for remote blacklists
- ICAP (supports virus scan engine)

Virus scanning (via plugins)

- External engine support (ICAP)
- ClamAV (Plugin / C-ICAP)

Reverse Proxy

- HAProxy - Load balancer (Plugin)

Online Identity Protection

- Tor - Anonymity online (Plugin)

Backup & Restore

- History & Diff support

- File Backup
- Cloud Backup
- Git Backup

SNMP

- Monitor & Traps

Diagnostics

- Filter reload status
- Firewall Info (pfInfo)
- Top Users (pfTop)
- Firewall Tables
 - Aliases
 - Bogons
- Current Open Sockets
- Show All States
- State Reset
- State Summary
- Wake on LAN
- ARP Table
- DNS Lookup
- NDP Table
- Ping
- Packet Capture
- Test Port
- Trace route

Monitoring

- Zabbix Agent (Plugin)
- Monit (Plugin)
 - Proactive System Monitoring
- Enhanced Reporting
 - Network Flow Analyzer 'Insight'
 - Fully Integrated
 - Detailed Aggregation
 - Graphical Representation
 - Clickable and Searchable
 - CVS Exporter
 - System Health
 - Round Robin Data
 - Selection & Zoom
 - Exportable
 - Traffic Graph
 - Live Traffic Monitoring

Network Monitoring

- Netflow Exporter
 - Version 5 & version 9
 - Local for 'Insight'

Firmware

- Support Virtual Installs
 - VMware tools (Plugin)
 - Xen Guest Utilities (Plugin)
- Easy Upgrade
 - Reboot warning for base upgrades
- SSL Flavour selectable
 - OpenSSL
 - LibreSSL
- Selectable Package Mirror
- Reinstall Single Package
- Lock Package (prevents upgrade)
- Audit Feature
 - Check installed packages for known security vulnerabilities
- Plugin Support



REST API

- ACL support

Online Documentation

- Free & Searchable

OPNsense® FULL SPECIFICATIONS AND MODEL COMPARISON

	DEC675	DEC695
		
Software		
Preinstalled software	OPNsense®	OPNsense®
License	Open Source + 1 year free Business Edition	Open Source + 1 year free Business Edition
Hardware Specifications		
GbE RJ45 Ports [10/100/1000Mbps]	4	4
USB Ports	1	1
Console Port	1	1
Internal Storage	32GB Solid State Flash [integrated uSD]	256GB NVMe Solid State Flash
Memory	4GB DDR3	8GB DDR3
CPU Cores	4 (1.6Ghz)	(1.6Ghz)
Virtual Interfaces (802.1q VLANs) ¹	4093	4093
System Performance		
Firewall Throughput	3300Mbps	3300Mbps
Firewall Packets Per Second	275Kpps	275Kpps
Firewall Port to Port Throughput	900Mbps	900Mbps
Firewall Port to Port Packets Per Second	75Kpps	75Kpps
Concurrent Sessions	3000000	7000000
Firewall Latency (average)	200us	200us
Firewall Policies (Recommended Maximum) ¹	10000	10000
IPsec VPN Throughput (AES256GCM16)	600Mbps	600Mbps
High Availability with State Synchronisation	Requires Two	Requires Two
Dimensions		
Height x Width x Length (mm)	22 x 185 x 134	22 x 185 x 134
Height x Width x Length (inches)	0.9 x 7.55 x 5.47	0.9 x 7.55 x 5.47
Form Factor	Desktop	Desktop
Weight (appliance only)	0.56Kg	0.6Kg
Environment		
Power Requirements	100-240VAC, 50-60Hz	100-240VAC, 50-60Hz
Power Consumption (Typical)	12W	12W
Heat Dissipation	41 BTU/hr	41 BTU/hr
Operating Temperature	0 to +40°C	0 to +40°C
Storage Temperature	-20 to +70°C	-20 to +70°C
Humidity	10-90% non-condensing	10-90% non-condensing
Regulatory Compliance		
	FCC part 15 Class A, CE, Rohs	FCC part 15 Class A, CE, Rohs

¹ The user interface is designed for normal business usage, large rulesets, high number of users or interface assignments may be less practical.

All measurements are based upon TCP traffic unless stated otherwise. Maximum PPS is a peak performance, measured using 100 byte packets. Firewall Port to Port package per seconds is the peak performance when using 1500 byte sized packages. Total Firewall Throughput is calculated by multiplying the maximum packets per second with a standard package size of 1500bytes. IPS performance is measured using a http simulation with random sized small (400-800 bytes) send packages and 1K-8K response packages with 150 simultaneous emulated users and 21000 rules enabled. SSL VPN is measured using AES256GCM16+SHA512 and total throughput is calculated based on system load. Concurrent sessions are based upon memory available, where one state consumes 1KB of memory and 1GB of memory is reserved for system tasks. Latency is measured using netperf.

Securing Networks™